


量程	D
100kg	M12X1.75
200kg	M12X1.75
300kg	M12X1.75
400kg	M12X1.75
500kg	M12X1.75

受力示意

配线图

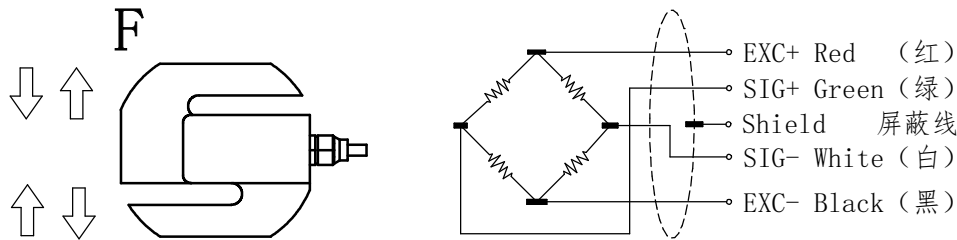

参数	Specifications	技术指标/Technique
额定量程	Capacity	100, 200, 300, 500kg
输出灵敏度	Reted output	2.0±1mV/V
零点输出	Zero Balance	±0.06mV/V
蠕变	Creep (30min)	≤0.03%F. S.
非线性	Non-linearity	≤0.03%F. S.
滞后	Hysteresis	≤0.03%F. S.
重复性	Repeatability	≤0.02%F. S.
输入电阻	Input impedance	385±10Ω
输出电阻	Output impedance	350±5Ω
温度灵敏度漂移	Temp.effect on output	0.02%F. S./10℃
零点温度漂移	Temp.effect on zero	0.02%F. S./10℃
绝缘电阻	Insulation resistance	≥5000MΩ/100V(DC)
激励电压	Recommended excitation	5~15V
最大激励电压	Maximum excitation	20V
温度补偿范围	Compensated Temp Range	-10~40℃
工作温度范围	Operating Temp Range	-30~70℃
安全过载	Safe overload	150%F. S.
极限过载	Ultimate overload	200%F. S.
电缆线尺寸	Cable size	Ø5x3000mm
产品重量	Weight	0.5kg
材料	Material	Alloy steel/合金钢

未标偏差注极限偏差数值					第一角画法	
尺寸分段	f(精密级)	m(中等级)	c(粗糙级)	y(最粗级)	设计	品名: FA308外形参数
0-6	±0.05	±0.1	±0.2	±0.5		
6-30	±0.1	±0.2	±0.5	±1		
30-120	±0.15	±0.3	±0.8	±1.5	批准	材料:
120-400	±0.2	±0.5	±1.2	±2.5		
400-1000	±0.3	±0.8	±2	±4		
1000-2000	±0.5	±1.2	±3	±6		
2000-6000	±1	±2	±4	±8		