



Capacity (N)	A	M
10, 20	5	M3
50, 100, 200, 300, 500	6	M4

受力示意图

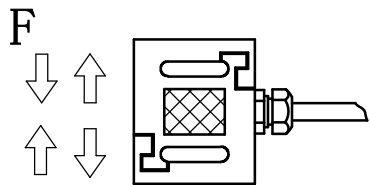

配线图

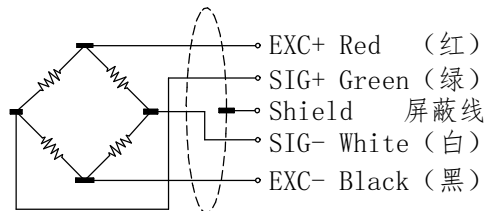

参数	Specifications	技术指标/Technique
额定量程	Capacity	10, 20, 50, 100, 200, 500, 1000N
输出灵敏度	Reted output	2.0 ± 10% mV/V
零点输出	Zero Balance	±0.02 mV/V
蠕变	Creep (30min)	≤ 0.05% F.S.
非线性	Non-linearity	≤ 0.05% F.S.
滞后	Hysteresis	≤ 0.05% F.S.
重复性	Repeatability	≤ 0.05% F.S.
输入电阻	Input impedance	650/350 ± 5 Ω
输出电阻	Output impedance	650/350 ± 5 Ω
温度灵敏度漂移	Temp. effect on output	0.05% F.S. / 10 °C
零点温度漂移	Temp. effect on zero	0.05% F.S. / 10 °C
绝缘电阻	Insulation resistance	≥ 5000 M Ω / 100V (DC)
激励电压	Recommended excitation	5V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated Temp Range	-10 ~ 60 °C
工作温度范围	Operating Temp Range	-20 ~ 80 °C
安全过载	Safe overload	150% F.S.
极限过载	Ultimate overload	200% F.S.
电缆线尺寸	Cable size	∅2x3000mm
产品重量	Weight	0.1kg
材料	Material	Stainless steel/不锈钢

未标偏差注极限偏差数值					第一角画法			
尺寸分段	f (精密级)	g (中等级)	k (短跑级)	v (最粗级)	比例	1: 1		
0-6	±0.05	±0.1	±0.2	±0.5			设计	
6-30	±0.1	±0.2	±0.5	±1	审核			
30-120	±0.15	±0.3	±0.8	±1.5			批准	
120-400	±0.2	±0.5	±1.2	±2.5				
400-1000	±0.3	±0.8	±2	±4				
1000-2000	±0.5	±1.2	±3	±6				
2000-6000	±1	±2	±4	±8				